
# ΒΑΛΒΙΔΑ ΠΡΟΣΤΑΣΙΑΣ ΑΠΟΧΕΤΕΥΣΕΩΝ



### ΑΣΦΑΛΙΣΤΕ ΤΟ ΣΠΙΤΙ ΣΑΣ ΓΙΑ ΠΑΝΤΑ ΑΠΟ:

Πλημμύρα του αποχετευτικού Τρωκτικά & Έντομα αποχετευτικού

### ΛΕΙΤΟΥΡΓΙΑ & ΕΓΚΑΤΑΣΤΑΣΗ

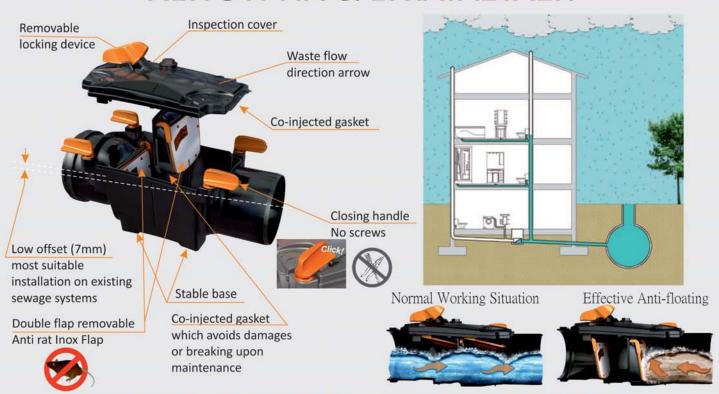



## ΕΥΚΟΛΑ - ΓΡΗΓΟΡΑ - ΑΠΟΤΕΛΕΣΜΑΤΙΚΑ





# a solution to flooding problems

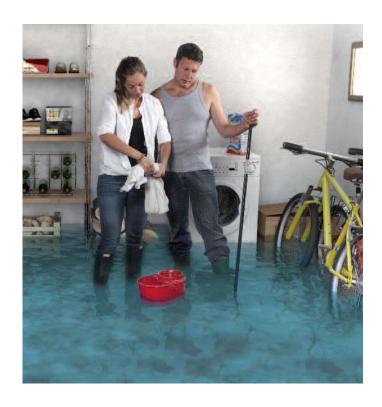

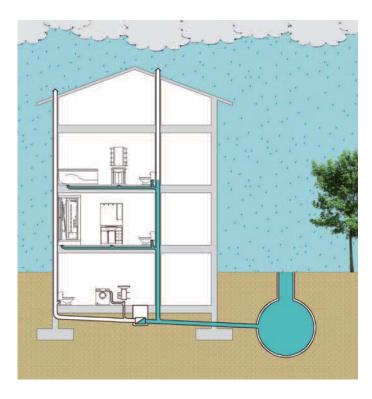

# Functionality



Normal working situation



Effective anti-flooding

Climatic changes plus more and more concentrated urbanization often leads to having overloaded sewage networks with consequent flooding problems.

The easiest and most economic solution to avoid this problem is the installation of a Non Return Valve.

This will protect homes from costly damage, whose resolution are always the owners responsibility.

OTTIMA has to be installed on waste water pipes and allows the outflow to reach the municipal sewage network avoiding water backflows

It is highly recommended in cases of:

- Fields which are under the water level
- Areas closest to rivers, lakes, sea
- When the sewage is linked to rainwater pipes (dangerous in case of heavy rain)
- If a sewage network overload has already occurred
- If an extension of the sewage network (with consequent overload) is probable
- When the municipal sewage network includes pumping stations.



### Avalable:





#### Avoid rust and oxidation

The plastic material the valve's body and components are all made of avoid acid corrosion problems and oxidation.

### ■ Inspection cover

Removable handle in order to avoid alteration to the valve. The cap has a co-injected gasket which avoids damages or breaking during maintenance.

### ■ Flap

Anti rat Inox Flap. No screws are necessary to fix the inox flap. The flap has a co-injected gasket which avoids damages or breaking during maintenance.

### Compact

The compact body of the valve OTTIMA allows the installation of the product even in cases where there is low space or walls in close proximity.




### **Installation Examples**

■ Lip seal version



■ Solvent weld version

### Spigot/Spigot version for renovation

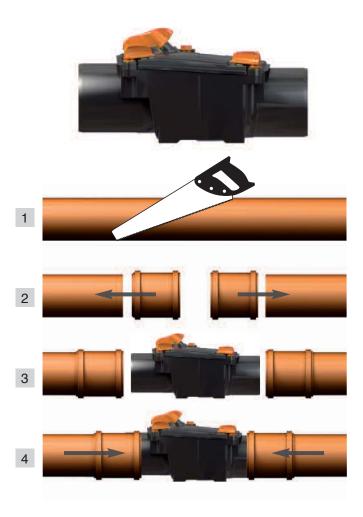



■ Application non-plastic materials



■ Plastics applications



# **Evolution and design**

Inlets and outlets comply with European Standards EN1329

and EN1401 where applicable.

Available diameters: 100 - 110 - 125 - 160



### **ELYSEE IRRIGATION LTD**

#### ΚΕΝΤΡΙΚΑ ΓΡΑΦΕΙΑ & ΕΡΓΟΣΤΑΣΙΟ

Οδός Πενταδάκτυλου 5, 2643 Βιομηχανική Περιοχή Εργατών

Tnλ: +357-22455000 Φαξ:+357-22455055 ΤΑΧ. ΔΙΕΥΘΥΝΣΗ P.O.Box 27014, 1641 Λευκωσία, Κύπρος www.elysee.com.cy elysee@elysee.com.cy

#### ΥΠΟΚΑΤΑΣΤΗΜΑΤΑ

#### ΥΠΟΚΑΤΑΣΤΗΜΑ ΛΕΥΚΩΣΙΑΣ

Οδός Χυτρών 20, 1075 Λευκωσία Tηλ: +357-22763381 Φαξ:+357-22763940

#### ΥΠΟΚΑΤΑΣΤΗΜΑ ΣΤΡΟΒΟΛΟΥ

Οδός Βουλιαγμένης 6, 2033 Βιομηχανική Περιοχή Στροβόλου Tηλ: +357-22516916 Φαξ:+357-22317913

### ΥΠΟΚΑΤΑΣΤΗΜΑ ΛΕΜΕΣΟΥ

Οδός Ιαπέτου 7, 4101 Βιομ. Περιοχή Αγίου Αθανασίου Tnλ: +357-25823555 Φαξ:+357-25722033

### ΥΠΟΚΑΤΑΣΤΗΜΑ ΛΑΡΝΑΚΑΣ

Οδός Ακροπόλεως 9, 6036 Λάρνακα Τηλ: +357-24641088 Φαξ:+357-24641089

#### ΥΠΟΚΑΤΑΣΤΗΜΑ ΠΑΦΟΥ

Περιοχή Κονιά, 8300 Πάφος Τηλ: +357-26813200 Φαξ:+357-26962122

#### ΥΠΟΚΑΤΑΣΤΗΜΑ ΦΡΕΝΑΡΟΥ

Οδός Καβάλου 9, 5350 Βιομ. Περιοχή Φρενάρου Τηλ: +357-23743771 Φαξ:+357-23743773

### ΠΛΗΡΗΣ ΓΚΑΜΑ ΥΛΙΚΩΝ ΓΙΑ ΑΠΟΧΕΤΕΥΣΗ





ΣΩΛΗΝΩΣΕΙΣ - ΕΞΑΡΤΗΜΑΤΑ





ΖΗΤΗΣΤΕ ΠΟΙΟΤΗΤΑ ΑΠΟ ΤΟΝ ΕΓΚΑΤΑΣΤΑΤΗ ΤΟΥ ΑΠΟΧΕΤΕΥΤΙΚΟΥ ΣΑΣ

